




Light source	LED
Voltage	12VDC or 24VDC
IP Rating	IP68 (0,5bar) / IP6K9K
Functionality	acc. to STANAG4381
Vibration / Shock	acc. to SAE J577
Temperature range	-40°C to +70°C
EMC	MIL-STD-461G (CE102, RE102)
Immunity to Load Dump	acc. VG96916-2/5.2.5.4
Corrosion	240h salt spray test (continuous spraying)
Humidity	DIN EN 60068-2-30 and DIN EN 60068-2-78
Connection	25cm open wire (2x0,5mm ² ADR cable) customer specific connectors upon request
Housing Material:	PC
HS Code	85122000
Weight	~ 50g

Art.No.	Voltage	Thread	Light Contour	LED style
74420001	24VDC	8-32 UNC	Y	visible
74420002	12V	8-32 UNC	Y	visible
74420003	24VDC	8-32 UNC	□	Visible
74420004	12VDC	8-32 UNC	□	Visible
74420005	24VDC	M5	Y	Visible
74420006	12VDC	M5	Y	Visible
74420007	24VDC	M5	□	Visible
74420008	12VDC	M5	□	Visible
74420009	24VDC	M5	Y	IR 940nm

Further styles / connectors upon request.

Dimensions:

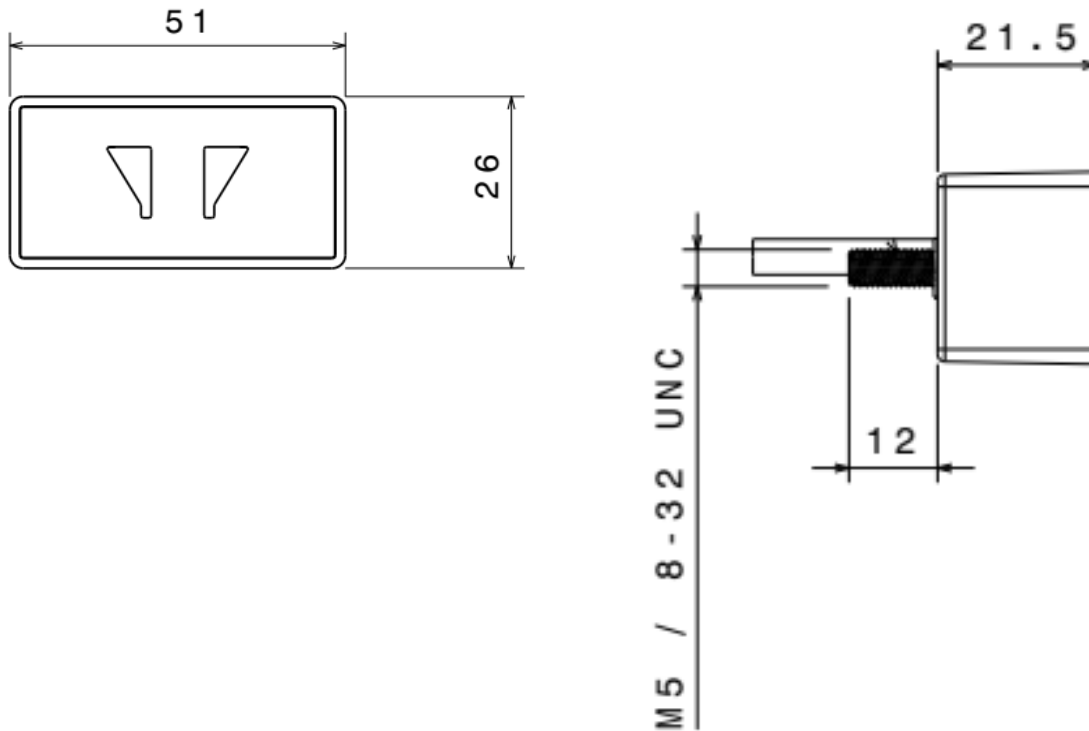

Light Contour:

