

PERMANENT MOUNT

Wireless Handheld Remote
20004GT (white) 20514GT (black)

Hardwired Dash Mount Remote
20204GT (white) 20214GT (black)

Wireless Handheld &
Wireless Dash Mount Remotes
20074GT (white) 20574GT (black)


PORTABLE MODELS

Permanent Shoe
Wireless Remote - 79004GT (white)

PORTABLE MODELS

Magnetic Shoe
Wireless Handheld Remote
79014GT (white) 79514GT (black)


185.4



204.4



LED Light Beam Dimensions




Illuminance (Lux) 870 218 55 14

Peak Beam Intensity: 544,000 Candela

Maximum Beam Distance: 1,475 m / 4,839 ft

Beam Angle: 8°

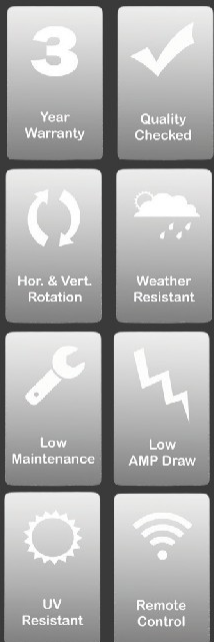

Housing:	Heat resistant and high impact injection molded housing ASA Polymer (white housing) ABS Polymer (black housing)
Parts:	Nylon, Acetal Rack O-ring, Stainless Steel pinion drive 15' 18G cord with universal cigarette lighter plug
Fasteners:	Stainless Steel
Motors:	Automotive grade 12V D.C. Stall Torque 15.6 g-cm No-load Speed 55.8 rpm Rated Output Power 1.42 W Stall Protected
Quality and Type of LED's:	10 High Flux LED's P-Vex lens technology 8° beam angle Anodized Aluminum heat sink w/liquid powder-cast finish
Peak Beam Intensity:	544,000 Candela
Max Beam Distance:	4,839 ft
Voltage DC:	12/24V
Power Consumption:	40W
Max Current Draw:	3.7 amps
Wireless Remote Control:	Radio Frequency: 433 MHz > 2000 possible address codes with 7 station dip switch Transmitter power: 2 Duracell MN21 12v batteries Radio Frequency allows for remote operation up to 80 feet away Lamp On/Off , Directional Controls, Speed Selector
Hardwired Dash Control:	Lamp On/Off, Directional Controls 20' of six wire cord, 10' increments as accessories
Warranty:	3 Year Limited Warranty
Mounting Options:	Permanent Mount, Portable Light/Magnetic Shoe, Portable Light/Permanent Shoe
Rockguard:	Optional Accessory